


# ニイツ道路用側溝 (NLD-N)

## 形状図

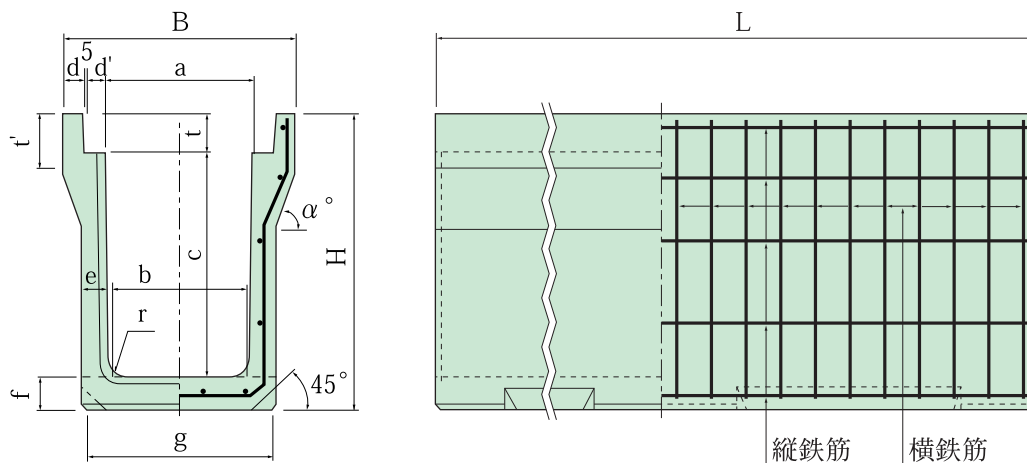

## 規格表

単位 mm

呼び名	寸法													配筋				参考重量 (kg)			
	B	H	a	b	c	d	d'	e	f	g	t	t'	r	L	α°	径	本数 (本)		径	本数 (本)	
250	B	410	400	250	236	250	45	30	50	50	250	100	140	50	2,000	45	6.0	19	4.0	9	250
	C		515		231	350			65	65	341						6.0	21	4.0	11	369
	D		625		225	450			75	75	355						D 6	16	4.0	10	478
	E		730		220	550			80	80	360						D 6	20	5.0	13	572
300	B	470	465	300	275	300	50	30	65	65	300	100	150	50	2,000	45	6.0	20	4.0	10	354
	C		565		267	400			65	65	377						D 6	16	4.0	10	422
	D		675		258	500			75	75	388						D 6	18	4.0	12	524
	E		780		250	600			80	80	390						D 6	22	5.0	14	608
	F		885		242	700			85	85	392						D 6	26	5.0	16	709
	G		987		234	800			87	87	388						D10	18	6.0	18	774
	H		1,090		226	900			90	90	386						D10	20	6.0	20	861
I	1,195	218	1,000	95	95	388	D10	22	6.0	20	960										
400	B	630	580	400	370	400	55	55	70	70	430	110	140	50	2,000	45	D 6	20	4.0	14	516
	C		690		360	500			80	80	490						D 6	18	4.0	14	634
	D		790		352	600			80	80	492						D10	14	4.0	16	720
	E		895		336	700			85	85	494						D10	16	D 6	14	813
	F		1,000		336	800			90	90	496						D10	18	D 6	18	916
	G		1,105		328	900			95	95	498						D10	20	D 6	18	1,022
	H		1,210		320	1,000			100	100	500						D10	22	D 6	20	1,137
	I		1,315		312	1,100			105	105	502						D10	24	D 6	20	1,257
	J		1,420		304	1,200			110	110	504						D13	16	D 6	22	1,383
	600		B		850	825			600	552	600						60	60	85	85	600
C		930	544	700		90	90	704		D10	14	D 6	17	983							
D		1,035	536	800		95	95	706		D10	18	D 6	19	1,094							
E		1,140	528	900		100	100	708		D10	22	D 6	19	1,213							
F		1,245	520	1,000		105	105	710		D10	20	D 6	19	1,335							
G		1,350	512	1,100		110	110	712		D10	22	D 6	21	1,446							
H		1,455	504	1,200		115	115	714		D13	16	D 6	21	1,600							
I		1,560	496	1,300		120	120	716		D13	16	D 6	23	1,741							

※L=1,000も製造できます。