


落ちふた式U形側溝

JIS A 5372

形状図

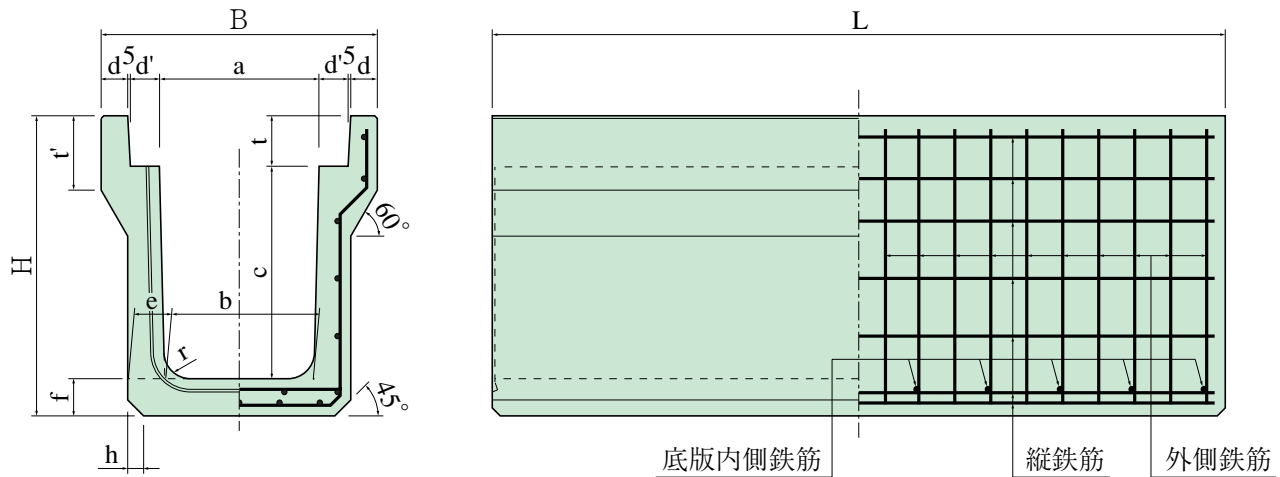

規格表


単位 mm

種類	呼び名	寸 法													配 筋						参考質量 (kg)				
		B	H	a	b	c	d	d'	e	f	h	t	t'	r	L	外側鉄筋		底版内側鉄筋		縦鉄筋					
																径	数量(本) L=2000	数量(本) L=1000	径	数量(本) L=2000	数量(本) L=1000	径	数量(本)	L=2000	L=1000
1種 歩道用	250	450	395	250	230	250	40	55	55	55		90	120			4.0						11	290	145	
	300A	500	455	300	280	300	40	55	60	60		95	120			4.0						11	348	174	
	300B	500	560	300	270	400	40	55	65	65		95	120			4.0						13	420	210	
	300C	500	665	300	260	500	40	55	70	70	20	95	120			5.0	10	6	-	-	-	4.0	15	493	249
	400A	600	575	400	370	400	40	55	65	65		110	135			5.0						14	348	229	
	400B	600	680	400	360	500	40	55	70	70		110	135			5.0						16	536	268	
	500A	720	695	500	460	500	45	60	70	70		125	150			5.0						17	594	297	
	500B	720	800	500	450	600	45	60	75	75		125	150			D6						21	680	340	
3種 車道用	250	460	405	250	230	250	45	55	65	65	30	90	120			5.0	20	10	5.0	20	10	13	333	167	
	300A	520	465	300	280	300	50	55	70	70	30	95	140			5.0	24	12	5.0	24	12	13	419	210	
	300B	520	565	300	270	400	50	55	70	70	40	95	140			D6	19	11	D6	10	6	15	472	236	
	300C	520	675	300	260	500	50	55	80	80	40	95	140			D6	21	11	D6	11	6	17	585	293	
	400A	630	580	400	370	400	55	55	70	70	40	110	140			D6	23	12	D6	12	6	17	516	258	
	400B	630	690	400	360	500	55	55	80	80	40	110	140			D6	23	12	D6	12	6	19	634	317	
	500A	750	705	500	460	500	60	60	80	80	40	125	155			D6	23	12	D6	12	6	20	700	350	
	500B	750	815	500	450	600	60	60	90	90	40	125	175			D6	25	13	D6	13	7	24	849	425	

落ちふた式U形側溝（ふた）

JIS A 5372

形状図

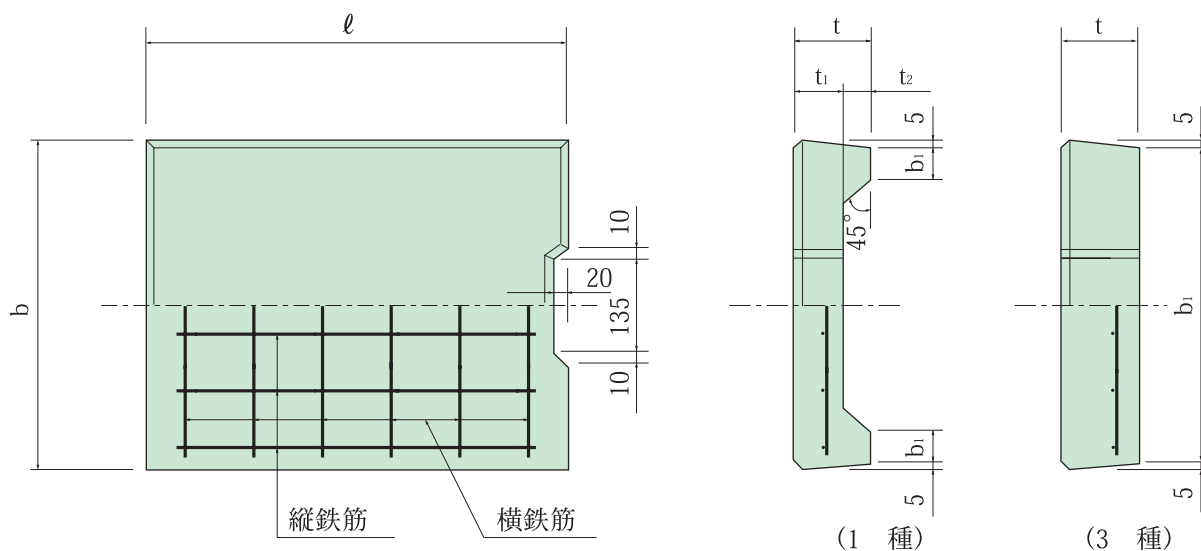

規格表

単位 mm

呼び名		寸法						配筋				参考質量 (kg)
		b	b ₁	t	t ₁	t ₂	ℓ	横鉄筋		縦鉄筋		
径	数量 (本)							径	数量 (本)			
1 種 (歩道用)	250	362	50	90	55	35	500	4.0	6	4.0	3	29
	300	412	51	95	55	40					4	33
	400	512	51	110	65	45					5	47
	500	622	56	125	75	50					6	65
3 種 (車道用)	250	362	352	90	—	—	331	D6	4	4.0	3	26
	300	412	402	95	—	—	331	D10	3	D6	4	30
	250	362	352	90	—	—	500	D6	6	4.0	3	38
	300	412	402	95	—	—		D10	4	D6	4	45
	400	512	502	110	—	—		D10	5	D6	5	66
500	622	612	125	—	—	D10		6	D6	6	91	