


ベンチフリュームふた付暗きょ (BFC)

(新潟県規格) 農業土木事業協会

BFC ふた 形状図

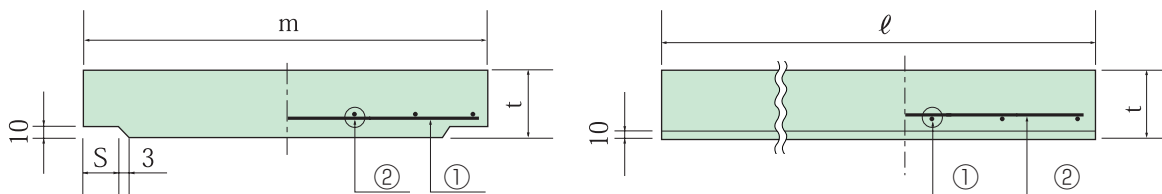

規格表

単位 mm

| 種類 呼び名 | BFCふたⅠ形 (T-14) | | | | | | | | 参考 質量 (kg) | BFCふたⅡ形 (T-4) | | | | | | | | 参考 質量 (kg) |
|-----------|----------------|-----|----|-------|-----------|-----|-----------|-----|------------------|---------------|----|-----|-----------|----------|-----------|----------|---|------------------|
| | 寸 法 | | | | 配 筋 | | | | | 寸 法 | | | | 配 筋 | | | | |
| | | | | | 横鉄筋 ① | | 縦鉄筋 ② | | | | | | | 横鉄筋 ① | | 縦鉄筋 ② | | |
| m | t | s | ℓ | 径 | 数量 (本) | 径 | 数量 (本) | m | t | s | ℓ | 径 | 数量 (本) | 径 | 数量 (本) | | | |
| 200 | 290 | 50 | 43 | 1,000 | 6.0 | 12 | 5.0 | 5 | 33 | 290 | 50 | 43 | 1,000 | 6.0 | 12 | 5.0 | 5 | 33 |
| 250 | 340 | 55 | 43 | | 6.0 | 13 | 5.0 | 6 | 43 | 340 | 55 | 43 | | 6.0 | 13 | 5.0 | 6 | 43 |
| 300 | 390 | 60 | 43 | | 6.0 | 14 | 5.0 | 7 | 54 | 390 | 60 | 43 | | 6.0 | 14 | 5.0 | 7 | 54 |
| 350 | 450 | 65 | 48 | | 6.0 | 16 | 5.0 | 8 | 68 | 450 | 65 | 48 | | 6.0 | 16 | 5.0 | 8 | 68 |
| 400 | 510 | 75 | 53 | | 9.0 | 9 | 6.0 | 7 | 89 | 510 | 70 | 53 | | 6.0 | 15 | 5.0 | 8 | 83 |
| 450 | 560 | 85 | 53 | | 9.0 | 9 | 6.0 | 7 | 112 | 560 | 75 | 53 | | 6.0 | 17 | 6.0 | 6 | 98 |
| 500 | 620 | 90 | 58 | | 9.0 | 10 | 6.0 | 7 | 131 | 620 | 75 | 58 | | 9.0 | 9 | 6.0 | 6 | 109 |
| 550 | 670 | 100 | 58 | | 9.0 | 10 | 6.0 | 7 | 158 | 670 | 80 | 58 | | 9.0 | 8 | 6.0 | 6 | 126 |
| 600 | 720 | 110 | 58 | | 9.0 | 10 | 6.0 | 7 | 187 | 720 | 80 | 58 | | 9.0 | 9 | 6.0 | 7 | 135 |
| 650 | 780 | 115 | 63 | | 9.0 | 11 | 6.0 | 7 | 212 | 780 | 85 | 63 | | 9.0 | 9 | 6.0 | 7 | 156 |
| 700 | 830 | 125 | 63 | 13.0 | 6 | 9.0 | 5 | 246 | 830 | 90 | 63 | 9.0 | 9 | 6.0 | 7 | 176 | | |
| 800 | 930 | 135 | 63 | 13.0 | 6 | 9.0 | 5 | 298 | 930 | 90 | 63 | 9.0 | 10 | 6.0 | 7 | 198 | | |
| 900 | 1,040 | 150 | 68 | 13.0 | 7 | 9.0 | 5 | 371 | 1,040 | 95 | 68 | 9.0 | 10 | 6.0 | 7 | 234 | | |
| 1,000 | 1,140 | 160 | 68 | 13.0 | 7 | 9.0 | 6 | 434 | 1,140 | 100 | 68 | 9.0 | 10 | 6.0 | 7 | 270 | | |